

# Conventional sounders

## SCD-100



---

**Indoor alarm sounder.** 32 selectable tones. Power at 24Vdc/12.5mA. IP44. Red color. Acoustic power between 87,5dB. CPR certificate EN54-3. Dimensions: 65 x 90 mm.

---

## SCD-200



---

**Indoor alarm sounder.** 32 selectable tones. Power at 24Vdc / 7mA at 32mA according to tone. IP43. Red color. Acoustic power between 95 and 100 dB according to tone. CPR certificate EN54-3. Dimensions: 85x75 mm.

---

## SCD-210



---

**Outdoor alarm sounder.** 32 selectable tones. Power at 24Vdc / 7mA at 32mA according to tone. IP65. Red color. Acoustic power between 95 and 100 dB according to tone. CPR certificate EN54-3. Dimensions: 100 x 75 mm.

---

**SFD-220**



---

*Indoor alarm sounder with beacon. 32 selectable tones. Power at 24Vdc / 8mA at 36mA according to tone. IP43. Red color. Acoustic power between 78 and 116 dB according to tone. CPR certificate EN54-3. Dimensions: 85 x 75 mm.*

---

**SFD-230**



---

*Outdoor alarm sounder with beacon. 32 selectable tones. Power at 24Vdc / 8mA at 36mA according to tone. IP65. Red color. Acoustic power between 78 and 116 dB according to tone. CPR certificate EN54-3. Dimensions: 100 x 75 mm.*

---

**SFD-221C**



---

*Indoor alarm sounder with white beacon for ceiling installation. Flash cover C-2.4-7. IP21C, power to 24Vdc, consumption of 25 to 40mA depending on the tone, 32 tones. Acoustic power between 78 and 98 dB. Certificate EN54-3 and EN54-23*

---

### **SFD-231C**



---

*Indoor alarm sander with white beacon for ceiling installation with deep base. Flash cover C-2.4-7. IP33C, power to 24Vdc, consumption of 25 to 40mA depending on the tone, 32 tones. Acoustic power between 78 and 98 dB. Certificate EN54-3 and EN54-23.*

---

### **SFD-221W**



---

*Indoor alarm sander with white beacon for wall installation. Flash cover W-2.4-8. IP21C, power to 24Vdc, consumption of 25 to 40mA depending on the tone, 32 tones. Acoustic power between 78 and 98 dB. Certificate EN54-3 and EN54-23.*

---

### **SFD-231W**



---

*Indoor alarm sander with white beacon for wall installation with deep base. Flash cover W-2.4-8. IP33C, power to 24Vdc, consumption of 25 to 40mA depending on the tone, 32 tones. Acoustic power between 78 and 98 dB. Certificate EN54-3 and EN54-23.*

---

**SCD-120**



---

*Alarm sounder with beacon. Power supply at 24Vdc / 200mA. Red color labeled "FIRE."  
Polycarbonate housing Dimensions: 297 x 210 x 75 mm.*

---

**CAMD-100**




---

*6" alarm bell. Low-power at 24 Vdc / 11 mA. Red color. Indoor use. Maximum acoustic power  
94 dB. CPR Certificate EN54-3.*

---

**RLI-80**

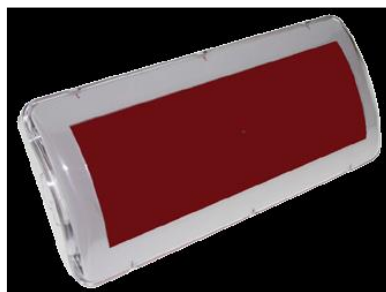

---

*Light indicator with buzzer. 24Vdc power supply. High brightness LED lighting. Polycarbonate  
case with transparent front. White color. "FIRE ALARM" label included. CPR certificate EN54-3.*

---

## Conventional beacons

### PED-50



---

*Beacon of polycarbonate, red color glass and black base. 24Vdc / 35mA. Indoor or outdoor use.*

---

### PED-60



---

*Beacon of polycarbonate, blue color glass and black base. 24Vdc / 35mA. Indoor or outdoor use.*

---

### PED-70



---

*Beacon of polycarbonate, amber color glass and black base. 24Vdc / 35mA. Indoor or outdoor use.*

---

### PED-221C



---

**Beacon with white color glass and red base for ceiling installation.** Beacon cover C-3-8. IP21C, power to 24Vdc, consumption of 25 to 40mA depending on the tone, 32 tones. Indoor use. Certificate EN54-23

---

**PED-231C**



---

**Beacon with white color glass and red base for installation in ceiling with deep base.** Beacon cover C-3-8. IP33C, power to 24Vdc, consumption of 25 to 40mA depending on the tone, 32 tones. Indoor use. Certificate EN54-23

---

**PED-221W**



---

**Beacon with white flash and red base for wall installation.** Beacon cover W-2,4-8. IP21C, power to 24Vdc, consumption of 25 to 40mA depending on the tone, 32 tones. Indoor use. Certificate EN54-23

---

**PED-231W**



---

**Beacon with white flash and red base for wall installation with deep base.** Beacon cover W-2,4-8. IP33C, power to 24Vdc, consumption of 25 to 40mA depending on the tone, 32 tones. Indoor use. Certificate EN54-23

---